

Compliant with all ASME A17.1 and CSA B44 Codes

REVISIONS

REV	DESCRIPTION	DATE	BY

STOPS: 2 IN-LINE OPP.

OPENINGS: 2 @ LOWER, UPPER

TRAVEL: T.B.D. RATED LOAD: 300 Lb

HOISTWAY DOORS	BI-PARTING	DRYWALL CONSTRUCTION
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	MASONRY CONSTRUCTION
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	PLAIN STEEL - PRIMED
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	STAINLESS STEEL - #4
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	COUNTER LOADING
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	1 1/2 HR UL "B" LABEL
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	EMERGENCY RELEASE
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	NON-PLUGGABLE INTERLOCK

HG-1 SINGLE CONTACT DOOR LOCK & CONTACT NEMA 1

HG-2 DOUBLE CONTACT INTERLOCK NEMA 1

JAMB MOUNTED 24V PUSHBUTTON STATIONS:
 NON-ILLUMINATED ILLUMINATED
 BUTTONS: UP DOWN 1 2 3
 LIGHTS: CAR HERE IN USE
 HEADER MOUNTED 24V CAR ARRIVAL LIGHTS

CAR GATE	PLAIN STEEL	<input checked="" type="checkbox"/> STAINLESS STEEL - #4
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	COLLAPSIBLE
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	BY OTHERS


ACCESS DOOR	PLAIN STEEL	<input checked="" type="checkbox"/> STAINLESS STEEL - #4
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	NONE / BY OTHERS

HOISTWAY TO BE BUILT BEFORE DUMBWAITER IS INSTALLED EXCEPT THE WALLS ARE TO BE OMITTED WHERE HOISTWAY DOORS OCCUR UNTIL THE DUMBWAITER IS INSTALLED & HOISTWAY DOORS ARE SET IN PLACE

SPECIAL REQUIREMENTS
 DRIVE TYPE: WINDING DRUM
 RATED SPEED: 50 fpm
 CONTROLLER MODEL: INTEL1-LIFT
 POWER: 208-230V SINGLE OR 3 PHASE 20 AMP

CUSTOMER	JOB NAME	SHIP TO	TITLE: Inteli-Lift 30 x 30 x 40 Front Back with Slide Up Gates


APPROVED
 DATE




JOB NO.

REV	DESCRIPTION	DATE	BY

REVISIONS

CUSTOMER	JOB NAME	SHIP TO
TITLE: DUMBWATER SECTION ELEVATION "A-A"		SEE PAGE 1
APPROVED		 Elevation Innovation Inc JOB NO.
DATE		

DECKING TO SUPPORT
900LB STATIC LOAD
& 1800LB IMPACT LOAD
BY G.C.

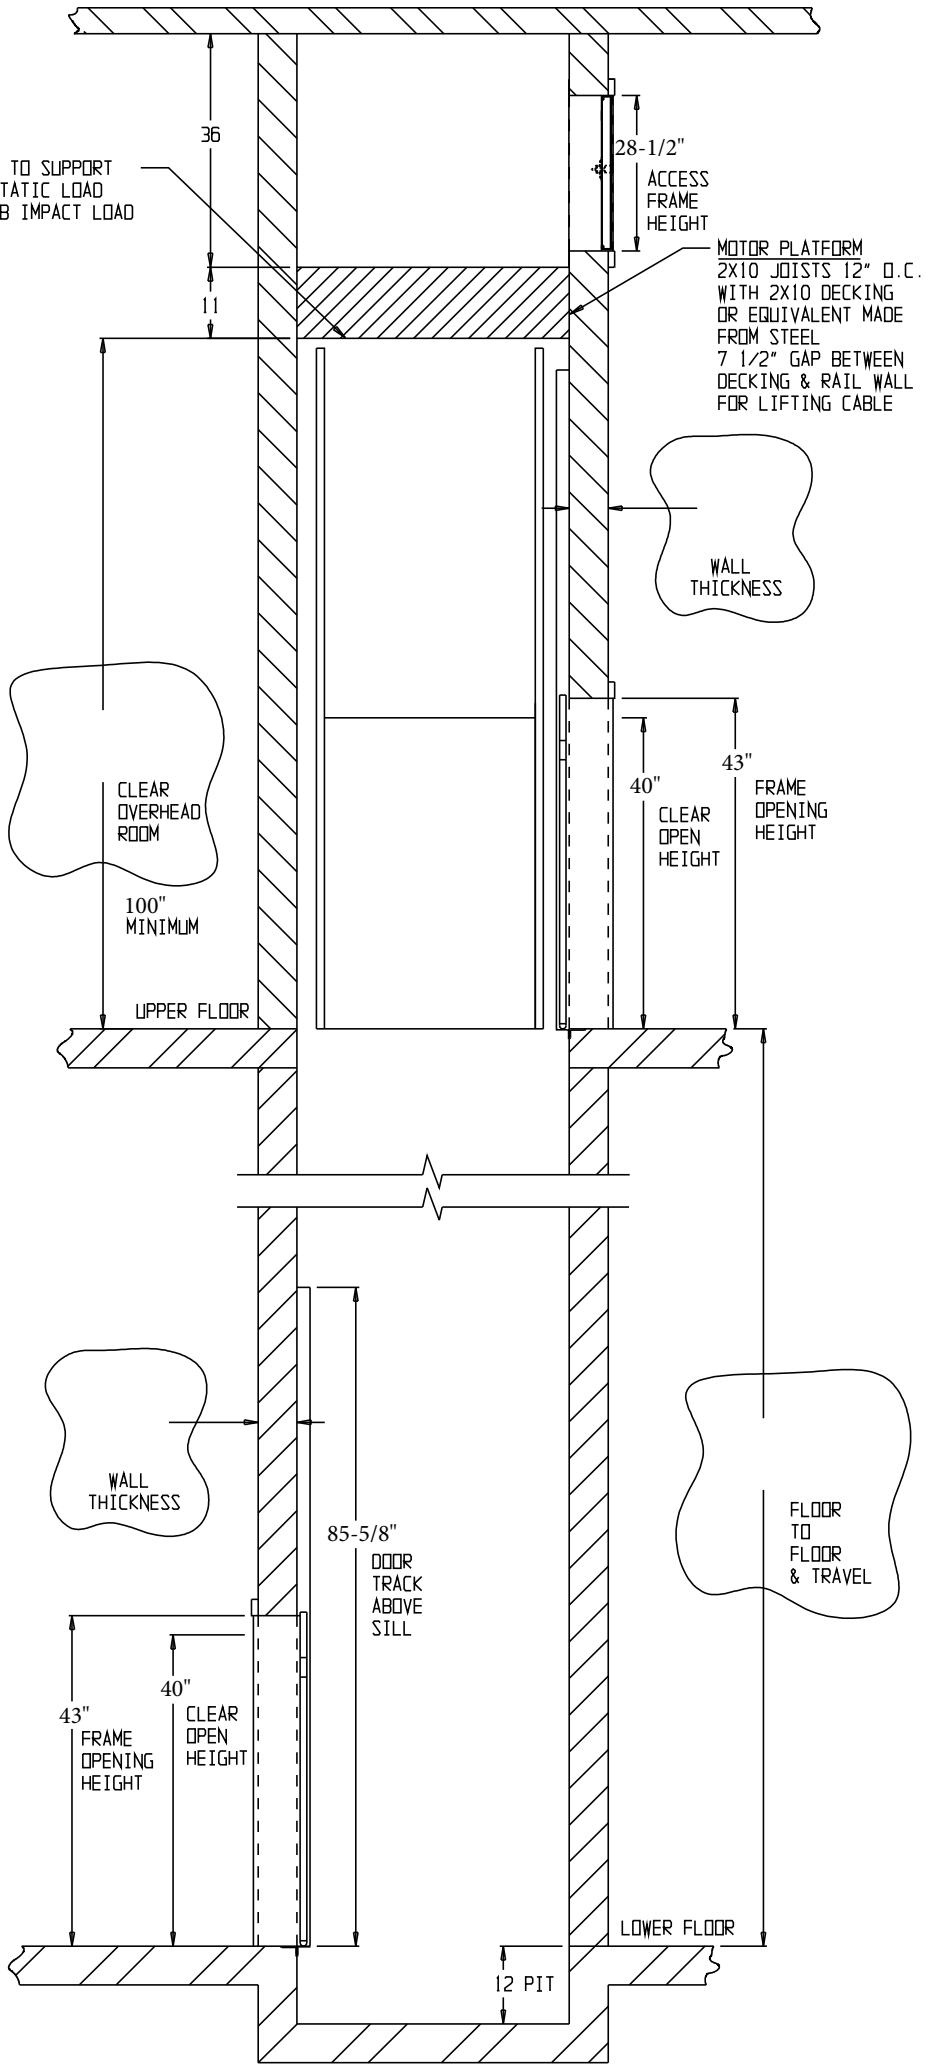

MOTOR PLATFORM
2X10 JOISTS 12" O.C.
WITH 2X10 DECKING
OR EQUIVALENT MADE
FROM STEEL
7 1/2" GAP BETWEEN
DECKING & RAIL WALL
FOR LIFTING CABLE

WALL THICKNESS

CLEAR OVERHEAD ROOM
100" MINIMUM

40" CLEAR OPEN HEIGHT

43" FRAME OPENING HEIGHT

UPPER FLOOR

WALL THICKNESS

85-5/8" DOOR TRACK ABOVE SILL

43" FRAME OPENING HEIGHT

40" CLEAR OPEN HEIGHT

FLOOR TO FLOOR & TRAVEL

LOWER FLOOR

12 PIT